



CROSS SECTION 'A'

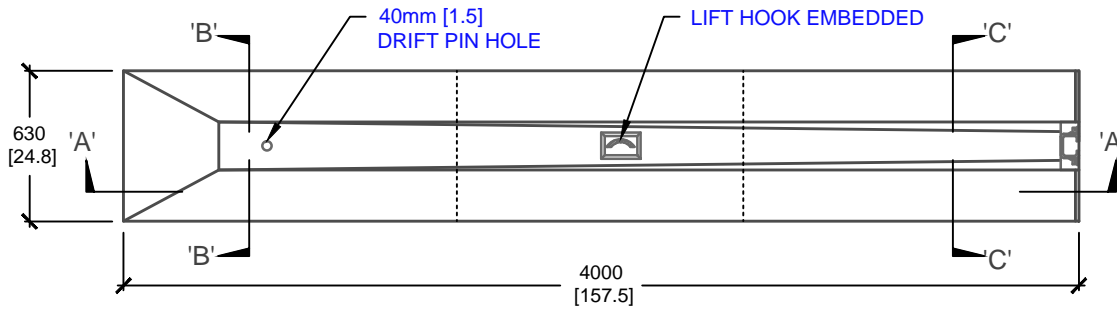

PLAN VIEW




CROSS SECTION 'B'




WHEN FEMALE TO FEMALE CONNECTION IS REQUIRED USE S100x14x800mm LONG STEEL I-BEAM



32mm x 1000mm DRIFT PIN



CROSS SECTION 'C'

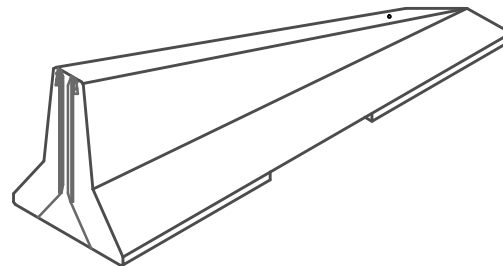

ISOMETRIC VIEW

mm [Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- AS PER OPSD 911.233
- USE WITH E46 TRANSITION

- CSA 23.4-05
- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT CODE:

E-47

TAPER I-LOCK BARRIER

DIMENSIONS:

670mm(H) x 4000mm(L)

TOTAL WEIGHT:

1,678 kg / 3,700 lbs

REVISION DATE:

SEPTEMBER 07, 2017

REV. # 3