


BOLT CIRCLE DIAMETER AS REQUIRED

PLAN VIEW

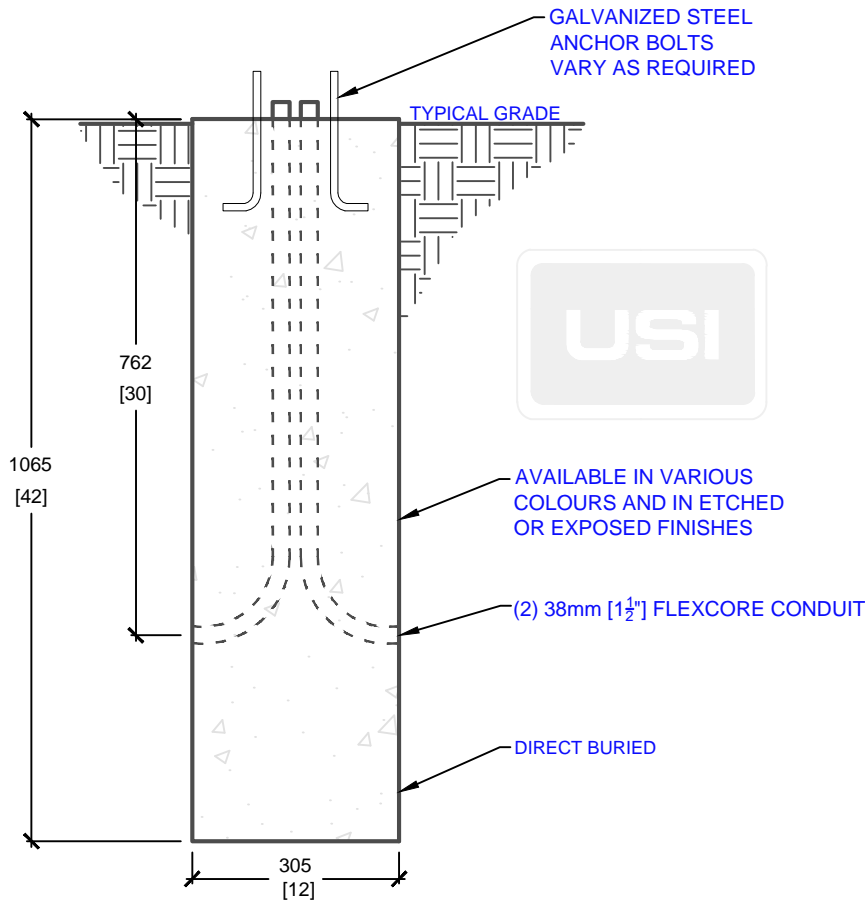


GALVANIZED STEEL ANCHOR BOLTS VARY AS REQUIRED

AVAILABLE IN VARIOUS COLOURS AND IN ETCHED OR EXPOSED FINISHES

(2) 38mm [1 1/2"] FLEXCORE CONDUIT

DIRECT BURIED

SIDE ELEVATION

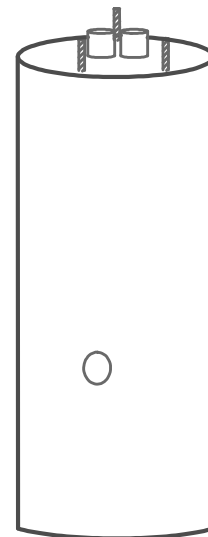

ISOMETRIC

mm [Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- ACCOMMODATES VARIOUS BOLLARD HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 125mm[5"] TO 254mm[10"]

- CSA 23.4-05
- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT CODE:

E-50-12

12" DIA. ROUND BOLLARD BASE

DIMENSIONS:

1.06(H) X 305mm Dia.

TOTAL WEIGHT:

91 kg / 200 lbs

REVISION DATE:

MAY 19, 2017

REV. # 1