


**PLAN VIEW**


BOLT CIRCLE DIAMETER AS REQUIRED

PRODUCT CODE	POLE HEIGHT (ft.)	BASE BURIAL DEPTH "X" (ft.)	OVERALL LENGTH (ft.)	WEIGHT (kg/lbs.)
E-50-24(6)	10-15	5' 9"	6	1,400kg / 3,080lbs
E-50-24(7)	16-25	6' 9"	7	1,600kg / 3,520lbs
E-50-24(8)	26-35	7' 9"	8	1,800kg / 4,000lbs
E-50-24(9)	36-45	8' 9"	9	2,000kg / 4,400lbs
E-50-24(10)	46-50	9' 9"	10	2,200kg / 4,850lbs
E-50-24(11)	51-55	10' 9"	11	2,400kg / 5,300lbs
E-50-24(12)	55-60	11' 9"	12	2,600kg / 5,750lbs

\* BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT

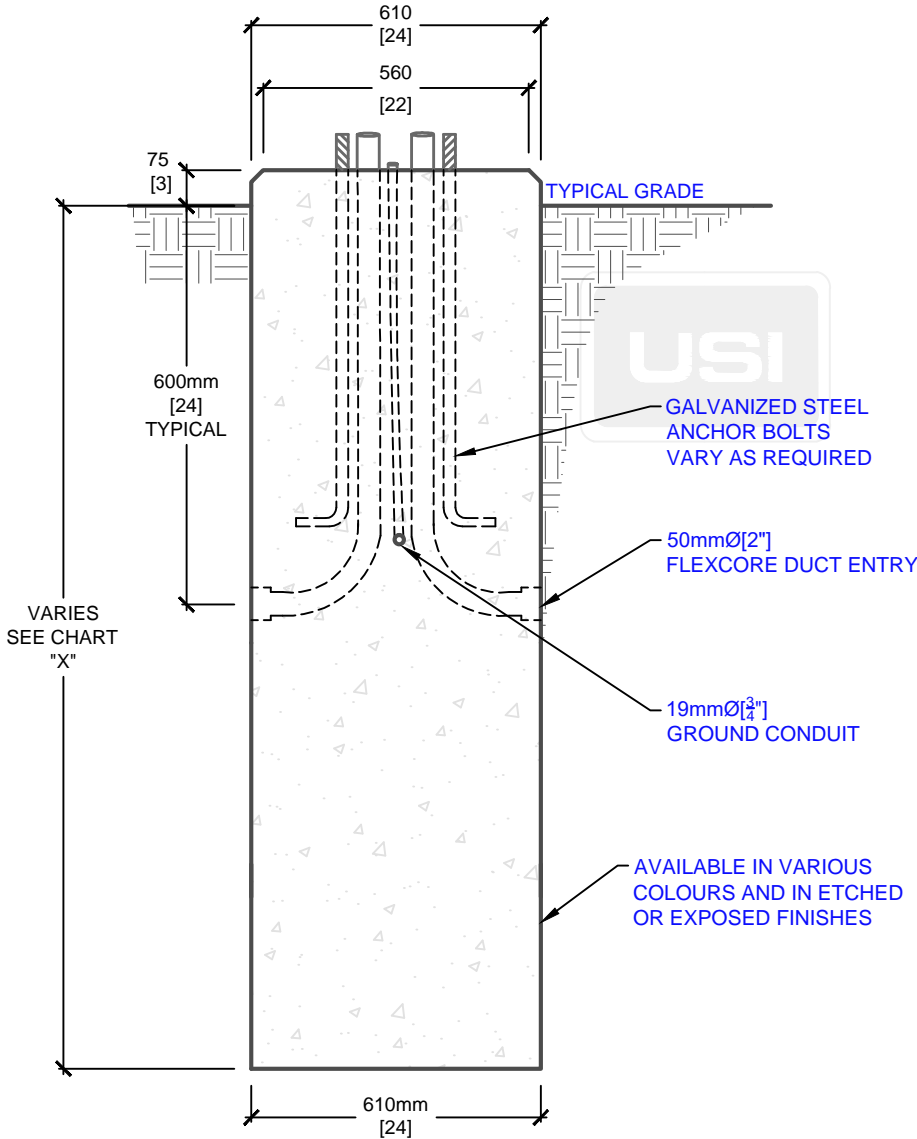

**SIDE ELEVATION**

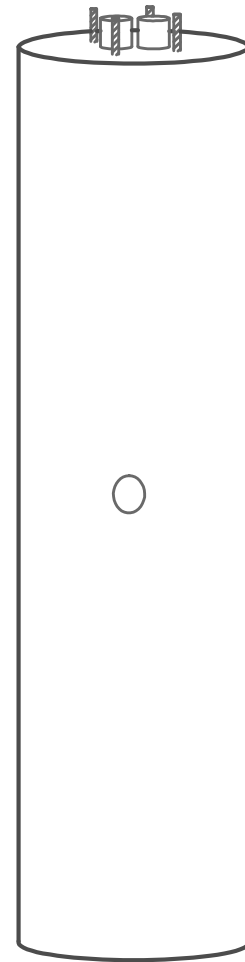

**ISOMETRIC VIEW**

mm [Inches]  
ALL DIMENSIONS DEFAULT TO MILLIMETRES



**UTILITY STRUCTURES INC.**

61 BONGARD AVE | OTTAWA, ON | K2E 6V2  
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

[www.utilitystructures.com](http://www.utilitystructures.com)

**CONSTRUCTION DETAILS:**

- ACCOMMODATES VARIOUS POLE HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 150mm[6"] TO 380mm[15"]

- CSA 23.4-05
- 45 MPa (6525psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

**PRODUCT CODE:**

**E-50-24(H)**  
24" PARKING LOT POLE BASE

**DIMENSIONS:**

**VARIES(H) X 610mm dia.**

**TOTAL WEIGHT:**

**VARIES**

**REVISION DATE:**

**MAY 19, 2017**

**REV. # 1**