


PROE CO		POLE HEIGHT	BASE BURIAL DEPTH	OVERALL LENGTH "X"	WEIGHT (ESTIMATED)
		(ft.)	(ft.)	(ft.)	(kg/lbs.)
E-59	9(8)	10-15	5	8	1,400kg / 3,100lbs
E-59	9(9)	16-25	6	9	1,550kg / 3,400lbs
E-59	(10)	26-35	7	10	1,700kg / 3,750lbs
E-59	(11)	36-45	8	11	1,900kg / 4,200lbs
E-59	(12)	46-50	9	12	2,100kg / 4,620lbs

- * BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT
- * HEIGHT ABOVE GRADE: 3 FEET (TYPICAL)

BOLT CIRCLE DIAMETER AS REQUIRED

19mm[\frac{3}{4}"] FLEXCORE GROUND CONDUIT

PLAN VIEW GALVANIZED STEEL ANCHOR BOLTS VARY AS REQUIRED 914 **AVAILABLE IN VARIOUS** [36] **COLOURS AND IN ETCHED** OR EXPOSED FINISHES 600 [24] TYPICAL **VARIES** SEE CHART 50mm[2"] FLEXCORE **DUCT ENTRY** "X"

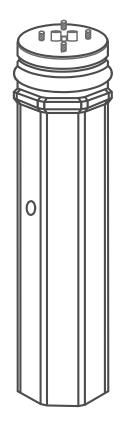

SIDE ELEVATION

560 [22]

ISOMETRIC VIEW

mm

[Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2 T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- ACCOMMODATES VARIOUS POLE HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 150mm[6"] TO 380mm[15"]
- CSA 23.4-05
- 45 MPa (6525psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT CODE:

E-59(H)

DECORATIVE PARKING LOT POLE BASE

INSIDE DIMENSIONS:

VARIES(H) X 560mm dia.

TOTAL WEIGHT:

VARIES

REVISION DATE: MAY 19, 2017

REV. #1