




**CROSS SECTION 'A'**

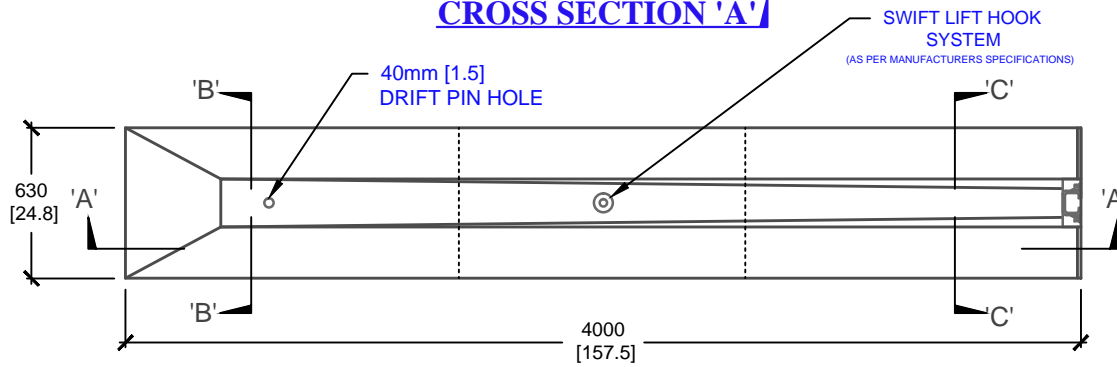

**PLAN VIEW**



**CROSS SECTION 'B'**




**CROSS SECTION 'C'**



WHEN FEMALE TO FEMALE CONNECTION IS REQUIRED USE S100x14x800mm LONG STEEL I-BEAM (SUPPLIED BY OTHERS)



32mm x 1000mm DRIFT PIN (SUPPLIED BY OTHERS)

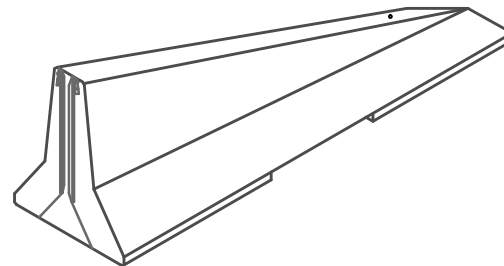

**ISOMETRIC VIEW**

mm [Inches]  
ALL DIMENSIONS DEFAULT TO MILLIMETRES



**UTILITY STRUCTURES INC.**

61 BONGARD AVE | OTTAWA, ON | K2E 6V2  
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

[www.utilitystructures.com](http://www.utilitystructures.com)

**CONSTRUCTION DETAILS:**

- AS PER OPSD 911.233
- USE WITH E46 TRANSITION

- CSA 23.4-05
- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

**PRODUCT CODE:**

**E-47**

TAPER I-LOCK BARRIER

**DIMENSIONS:**

**670mm(H) x 4000mm(L)**

**TOTAL WEIGHT:**

**1,678 kg / 3,700 lbs**

**REVISION DATE:**

**JANUARY 24, 2019**

**REV. # 4**