

60' | 65' | 70' ABOVE GRADE POLE HEIGHTS

! The poles cataloged below represent a sampling only. Other heights and strengths (classes) are available upon request.

60' ABOVE GRADE | 68' OVERALL LENGTH

POLE CATALOGUE NUMBER	CLASS	i OVERALL LENGTH [ft.]	ii POLE HEIGHT ABOVE GRADE [ft.]	iii DIRECT BURIAL DEPTH [ft.]	iv POLE TIP DIMENSION [in.]	v POLE BUTT DIMENSION [in.]	MAX EPA				NOMINAL POLE WEIGHT [lbs.]
							90 MPH [sq. ft.]	100 MPH [sq. ft.]	110 MPH [sq. ft.]	120 MPH [sq. ft.]	
HA-680	D	68	60	8	6 1/2	18 3/4	27	20	14	10	7884
HA-680	E	68	60	8	6 1/2	18 3/4	37	28	21	16	7984
HA-680	F	68	60	8	6 1/2	18 3/4	49	38	29	23	8184
HA-680	G	68	60	8	8	20 1/4	62	48	38	30	9613
HA-680	H	68	60	8	8	20 1/4	80	62	49	39	9663
HA-680	J	68	60	8	8	20 1/4	100	78	63	51	9763
HA-680	K	68	60	8	9 1/2	20 1/8*	121	95	76	62	10487

65' ABOVE GRADE | 74' OVERALL LENGTH

POLE CATALOGUE NUMBER	CLASS	i OVERALL LENGTH [ft.]	ii POLE HEIGHT ABOVE GRADE [ft.]	iii DIRECT BURIAL DEPTH [ft.]	iv POLE TIP DIMENSION [in.]	v POLE BUTT DIMENSION [in.]	MAX EPA				NOMINAL POLE WEIGHT [lbs.]
							90 MPH [sq. ft.]	100 MPH [sq. ft.]	110 MPH [sq. ft.]	120 MPH [sq. ft.]	
HA-740	G	74	65	9	8	19 9/16*	60	46	36	28	9863
HA-740	H	74	65	9	8	19 9/16*	77	60	47	37	9913
HA-740	J	74	65	9	8	19 9/16*	97	76	60	48	10013
HA-740	K	74	65	9	9 1/2	23 1/2*	117	92	74	59	15997
HA-740	L	74	65	9	12	23 1/2*	140	109	86	69	16047
HA-740	M	74	65	9	12	23 1/2*	167	131	105	85	16097

70' ABOVE GRADE | 79' OVERALL LENGTH



POLE CATALOGUE NUMBER	CLASS	i OVERALL LENGTH [ft.]	ii POLE HEIGHT ABOVE GRADE [ft.]	iii DIRECT BURIAL DEPTH [ft.]	iv POLE TIP DIMENSION [in.]	v POLE BUTT DIMENSION [in.]	MAX EPA				NOMINAL POLE WEIGHT [lbs.]
							90 MPH [sq. ft.]	100 MPH [sq. ft.]	110 MPH [sq. ft.]	120 MPH [sq. ft.]	
HA-790	G	79	70	9	8	20 5/16*	58	44	34	26	11233
HA-790	H	79	70	9	8	20 5/16*	75	58	45	35	11283
HA-790	J	79	70	9	8	20 5/16*	94	73	58	46	11383
HA-790	K	79	70	9	12	24 3/8*	111	85	66	52	17945
HA-790	L	79	70	9	12	24 3/8*	136	106	83	66	17995
HA-790	M	79	70	9	12	24 3/8*	163	128	101	82	18045

NOTE: The poles outlined represent a sampling only. Other heights and strengths (classes) are available upon request.

NOTE: The Hampton (HA) series in a Plain Grey (PG), mold finish (1) is standard for all sports lighting poles. Different colours and finishes are available upon request.

NOTE: Pole Butt Dimensions indicated with (*) have a taper of 13mm/m. Standard taper on all other poles is 15mm/m.

SPORTS LIGHTING POLE CODE – Standard Format

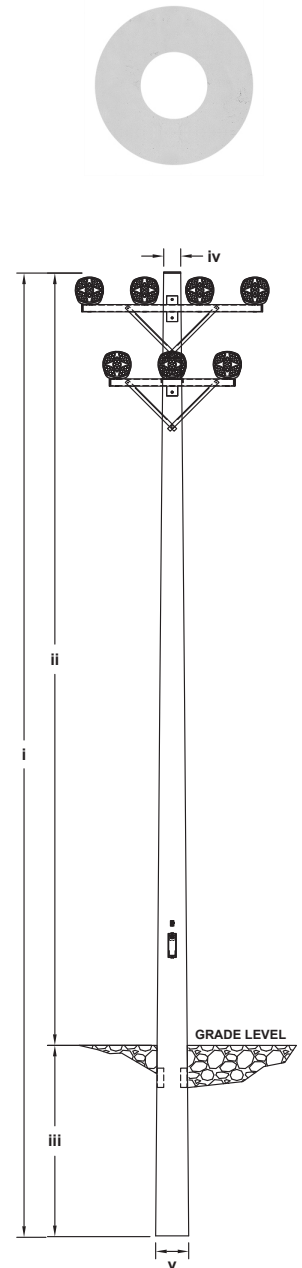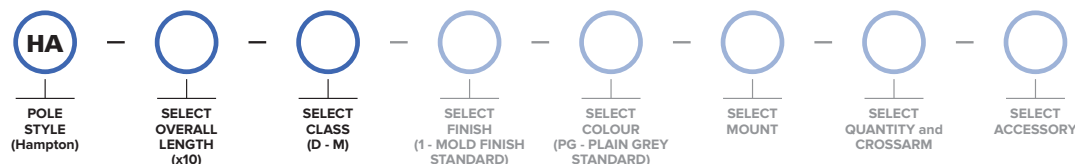

61 BONGARD AVENUE, OTTAWA, ONTARIO CANADA K2E 6V2
 TEL: [613] 225-6398 • FAX: [613] 225-1681 • TOLL FREE: 1-800-267-6466
www.utilitystructures.com