
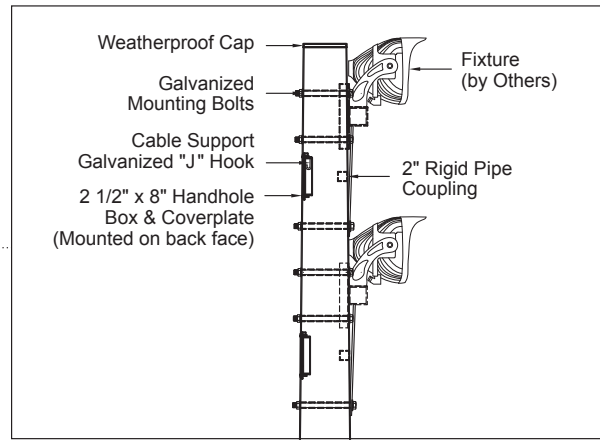


SPORTSLIGHTING POLES

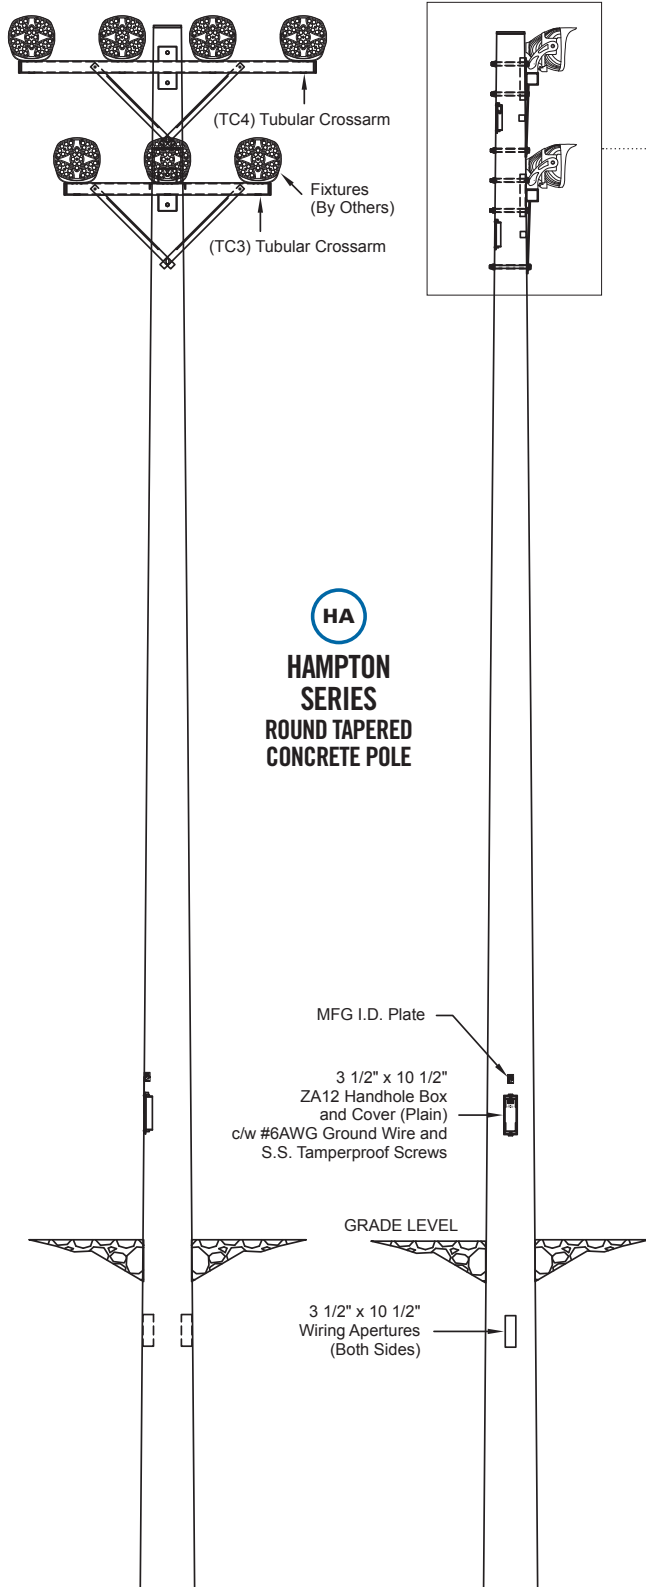

PHYSICAL DETAILS

- Prestressed Reinforced, Spun Concrete Pole
- Hampton series pole is a typical standard
- Round symmetrical cross section
- Standard taper of 15mm/metre (0.18"/foot)
- Standard Plain Grey Colour, but other colours are available upon request
- Standard mold finish, but etched decor finishes are available upon request
- Available in heights from: 35 feet to 79 feet overall (30' to 70' above grade)
- Will accept a variety of crossarm mounting configurations

STANDARD FEATURES

- Openings - All through holes for arms, fixtures, and accessories are available, refer to the technical information section
- Above grade Handhole - 3.5" x 10.5" standard handhole box is cast into pole at 36" above grade. Box and coverplate are both high density ZA12 Zinc Alloy material
- Below Grade Handhole - 3.5" x 10.5" cable entry handhole, 18" below grade
- Pole adapts to fit most fixtures, crossarms and accessories
- 2" x 8" standard handhole box with cover cast into the pole, located near the crossarms
- Electrical ground will be supplied with a #6 stranded copper wire
- Zinc (non-corrosive) inserts in 1/4", 3/8", 1/2", 5/8" or 3/4" are available
- CSA Identification name plate – manufacture date, height, class and Job #
- Top wiring will be through a 2" dia. threaded coupling
- Cable Support Galvanized "J" Hook

ACCESSORIES

- Fixture mounts (Crossarms & Bullhorn brackets)
- Pole Steps
- Platforms
- Lighting Protection System
- Base Mounted - Pole is generally directly buried, but base plate is optional

FIXTURES

- Supplied by Others



61 BONGARD AVENUE, OTTAWA, ONTARIO CANADA K2E 6V2
 TEL: [613] 225-6398 • FAX: [613] 225-1681 • TOLL FREE: 1-800-267-6466
 www.utilitystructures.com