


**PLAN VIEW**


BOLT CIRCLE DIAMETER AS REQUIRED

PRODUCT CODE	POLE HEIGHT (ft.)	BASE BURIAL DEPTH (ft.)	OVERALL LENGTH "X" (ft.)	WEIGHT (kg/lbs.)
P-57 (8)	5-14	5'	8'	960kg / 2,120lbs
P-57 (9)	15-19	6'	9'	1,080kg / 2,380lbs
P-57 (10)	20-24	7'	10'	1,200kg / 2,640lbs
P-57 (11)	25-29	8'	11'	1,320kg / 2,905lbs
P-57 (12)	30-40	9'	12'	1,440kg / 3,170lbs

\* BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT. THE POLE BASE DESIGN IS BASED ON THE ASSUMPTION THAT THE MINIMUM SOIL BEARING CAPACITY IS 150KPa AT s/s AND 225KPa AT ULS.

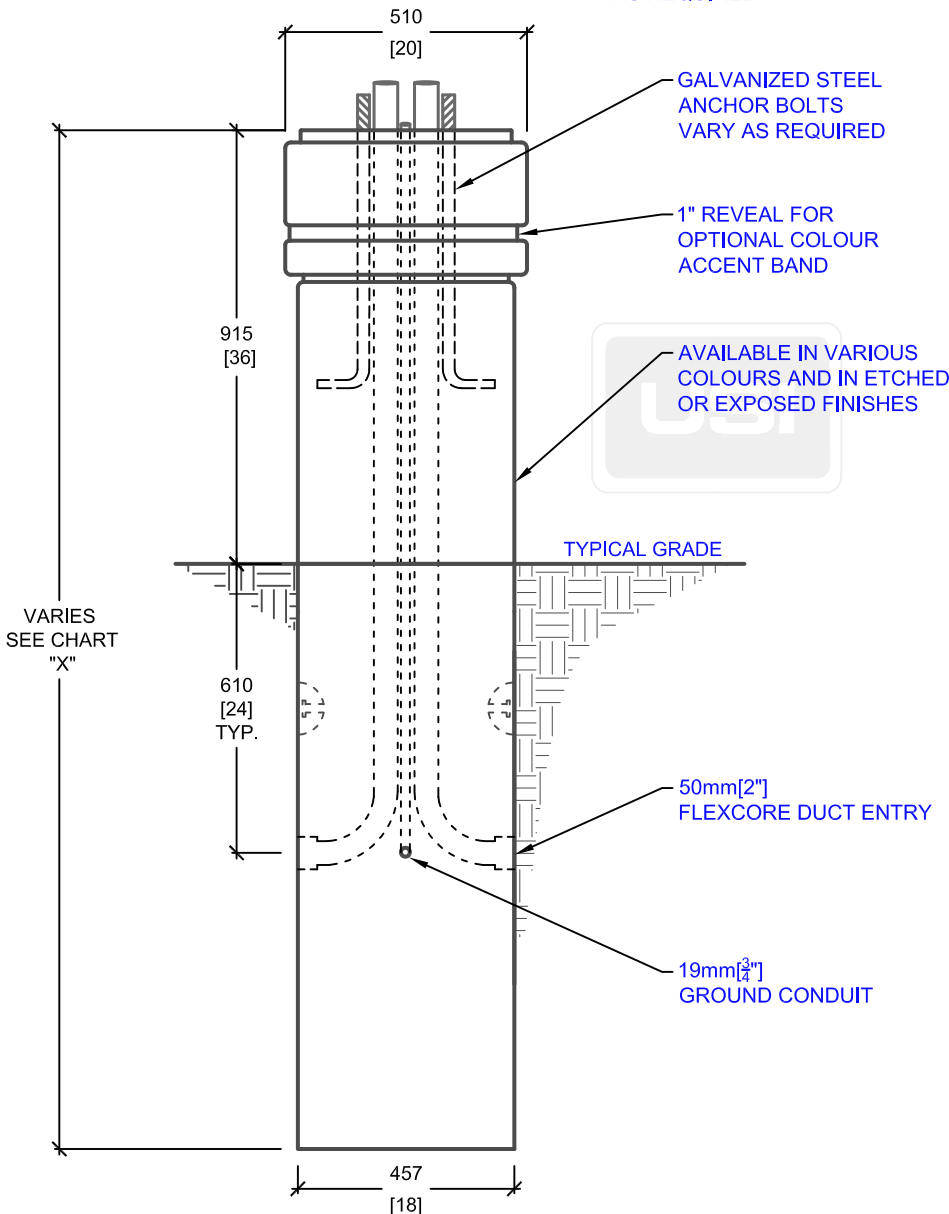

**SIDE ELEVATION**

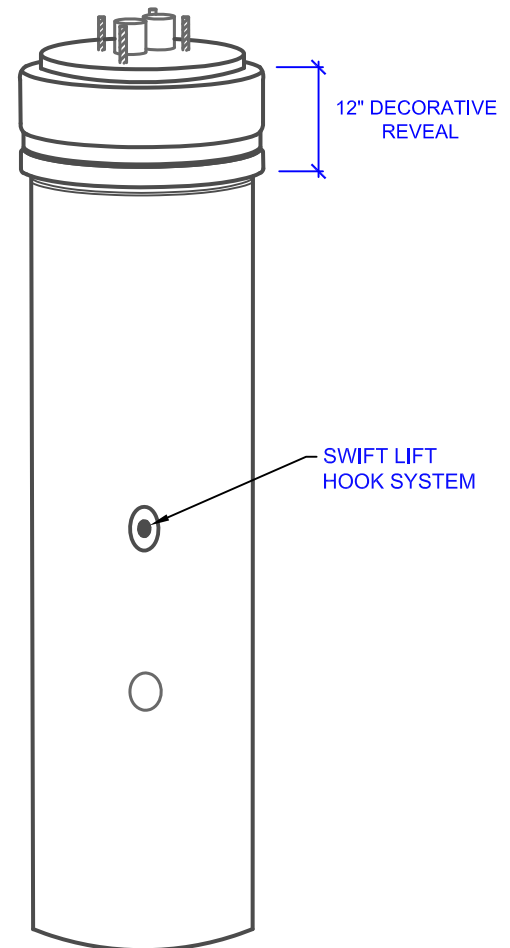

**ISOMETRIC VIEW**

mm [Inches]  
ALL DIMENSIONS DEFAULT TO MILLIMETRES



**UTILITY STRUCTURES INC.**

61 BONGARD AVE | OTTAWA, ON | K2E 6V2  
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

[www.utilitystructures.com](http://www.utilitystructures.com)

**CONSTRUCTION DETAILS:**

- ACCOMMODATES VARIOUS POLE HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 150mm[6"] TO 305mm[12"]

- CSA 23.4-05
  - 45 MPa (6525psi) AT 28 DAYS
  - STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
  - 5-8% AIR ENTRAINED
  - EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

**PRODUCT CODE:**

**P-57 (H)**

18" DIA. DECORATIVE POLE BASE

**DIMENSIONS:**

**VARIES(H) X 457mm dia.**

**TOTAL WEIGHT:**

**VARIES**

**REVISION DATE:**

**JULY 26, 2018**

**REV. # 1**