


PLAN VIEW


BOLT CIRCLE DIAMETER AS REQUIRED

| PRODUCT CODE | POLE HEIGHT (ft.) | BASE BURIAL DEPTH (ft.) | OVERALL LENGTH "X" (ft.) | WEIGHT (kg/lbs.) |
|--------------|----------------------|----------------------------|-----------------------------|---------------------|
| P-57 (8) | 5-14 | 5' | 8' | 960kg / 2,120lbs |
| P-57 (9) | 15-19 | 6' | 9' | 1,080kg / 2,380lbs |
| P-57 (10) | 20-24 | 7' | 10' | 1,200kg / 2,640lbs |
| P-57 (11) | 25-29 | 8' | 11' | 1,320kg / 2,905lbs |
| P-57 (12) | 30-40 | 9' | 12' | 1,440kg / 3,170lbs |

* BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT. THE POLE BASE DESIGN IS BASED ON THE ASSUMPTION THAT THE MINIMUM SOIL BEARING CAPACITY IS 150KPa AT SIS AND 225KPa AT ULS.

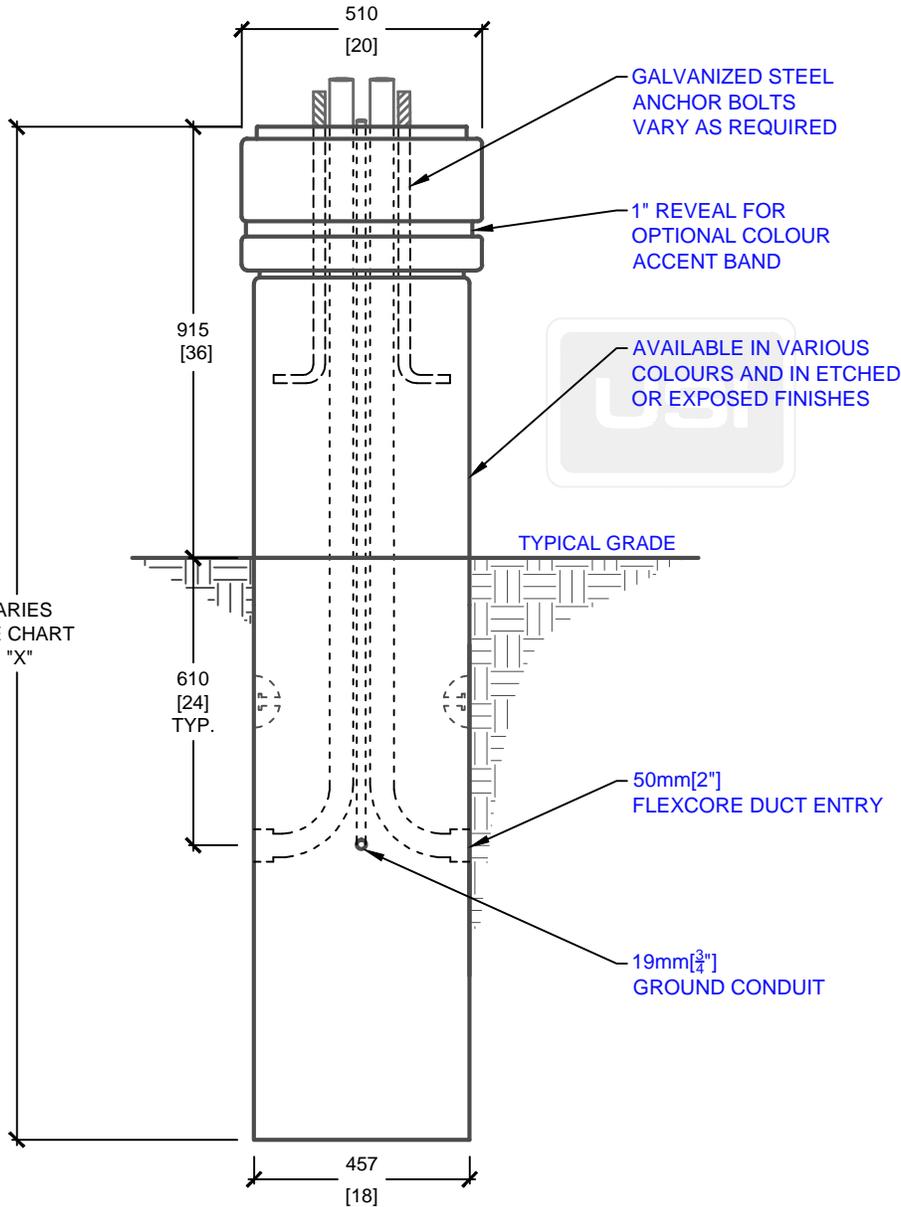

SIDE ELEVATION

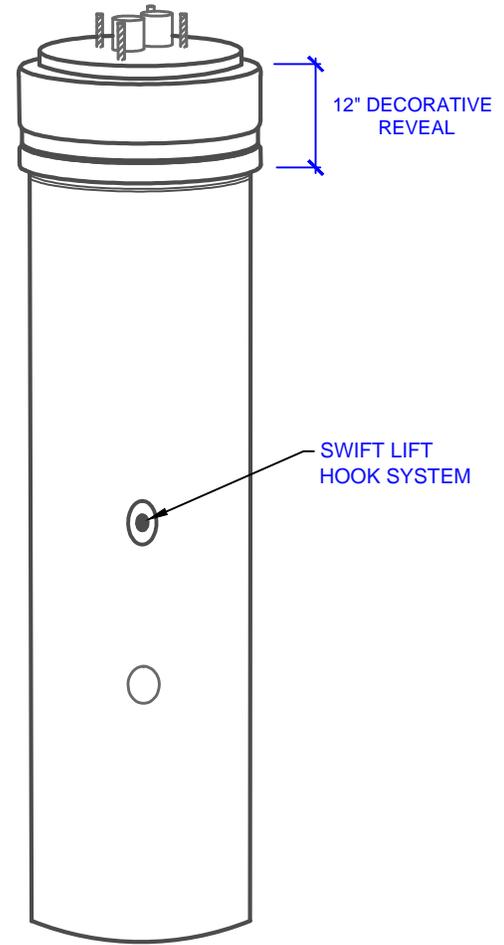

ISOMETRIC VIEW

mm [Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.
61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466
www.utilitystructures.com

- CONSTRUCTION DETAILS:**
- ACCOMMODATES VARIOUS POLE HEIGHTS
 - AVAILABLE IN VARIOUS COLOURS & FINISHES
 - ADJUSTABLE BOLT CIRCLE DIAMETER
 - BOLT CIRCLE DIAMETER: 150mm[6"] TO 305mm[12"]
 - CSA 23.4-05
 - 45 MPa (6525psi) AT 28 DAYS
 - STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
 - 5-8% AIR ENTRAINED
 - EXPOSURE CLASS: C-1
 - REINFORCING: STEEL TO CSA CAN A23.1

| | | | |
|-------------------------------|----------------------|-------------------------------|--|
| PRODUCT CODE: | | P-57 (H) | |
| 18" DIA. DECORATIVE POLE BASE | | | |
| DIMENSIONS: | | VARIES(H) X 457mm dia. | |
| TOTAL WEIGHT: | | VARIES | |
| REVISION DATE: | JULY 26, 2018 | REV. # 1 | |