




CROSS SECTION 'B'

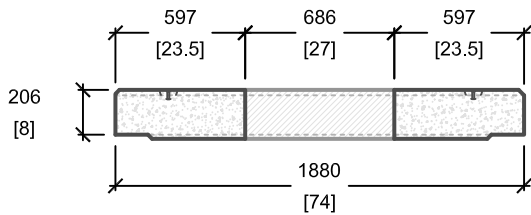

CROSS SECTION 'A'

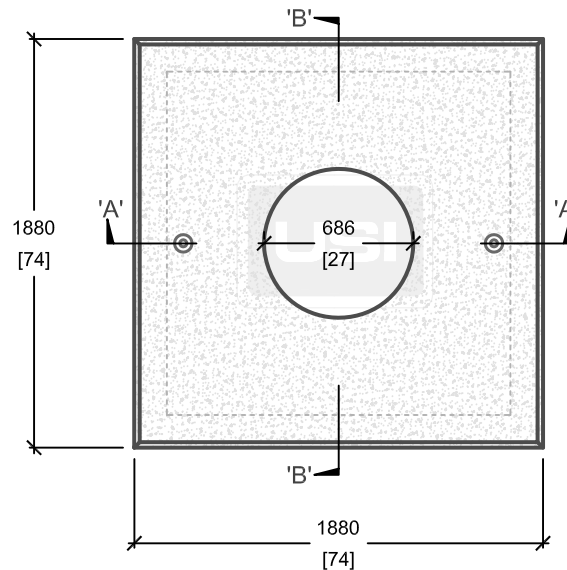

PLAN VIEW

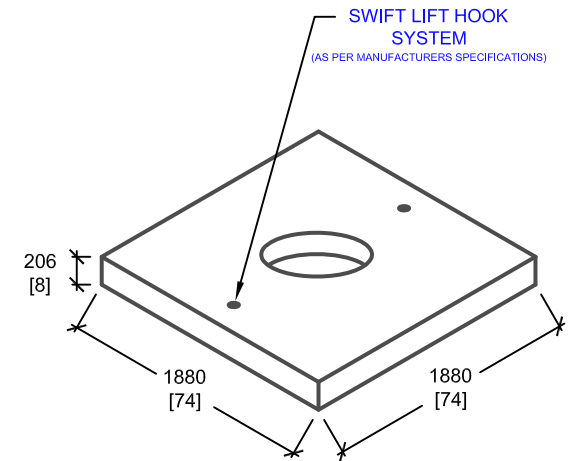

ISOMETRIC VIEW

mm
[Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- DESIGNED TO CL-625-ONT TRUCK LIVE LOADING AS PER CSA S6-06
- USE WITH BASE E10B
- CAN ALSO BE USED WITH E10 BASE

• **CSA 23.4**

- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT DETAILS:

- E-12 PAD
- (1) 686mm[27"] DIAMETER OPENING

CUSTOM OPTIONS AVAILABLE:

- CUSTOM ACCESS OPENING

PRODUCT CODE:

E-12

ELECTRICAL MANHOLE PAD

OUTSIDE DIMENSIONS:

0.2m(H) x 1880mm x 1880mm [O.D.]

TOTAL WEIGHT:

1,700 kg / 3,750 lbs

REVISION DATE:

JANUARY 24, 2018

REV. # 8