




CROSS SECTION 'B'

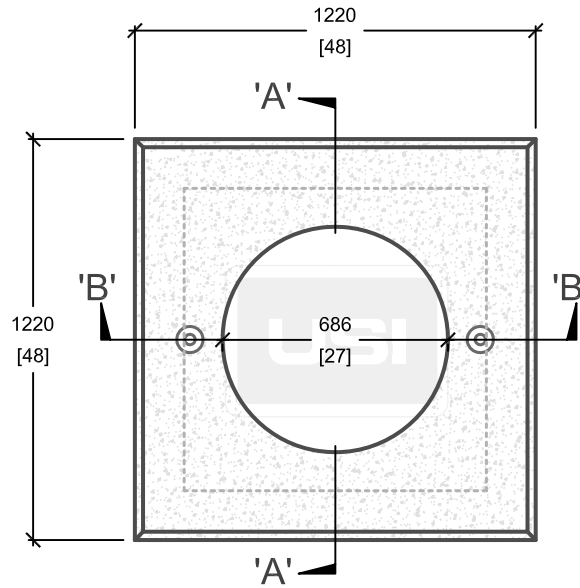

PLAN VIEW

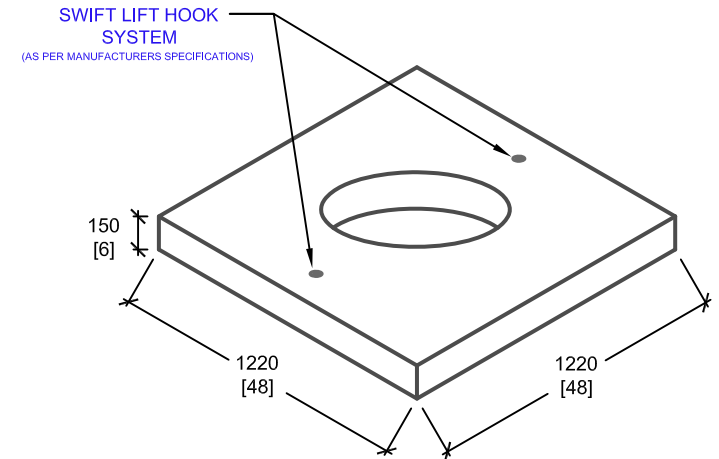

ISOMETRIC VIEW

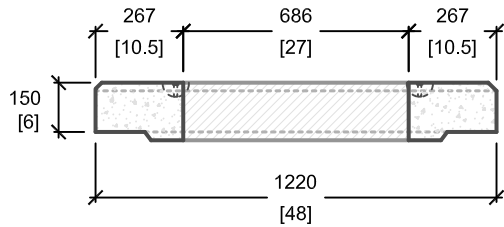

CROSS SECTION 'A'

mm
[Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- DESIGNED FOR CL-625-ONT TRUCK LIVE LOADING AS PER **CSA S6-06**
- USE WITH E-1 OR E-1B MANHOLE BASE

• **CSA 23.4**

- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT DETAILS:

- PAD OPENING: 686mm[27"]

CUSTOM OPTIONS AVAILABLE:
CUSTOM OPENING

PRODUCT CODE:

E-3

ELECTRICAL MANHOLE PAD

OUTSIDE DIMENSIONS:

0.15m(H) x 1220mm x 1220mm [O.D.]

TOTAL WEIGHT:

400 kg / 880 lbs

REVISION DATE:

FEBRUARY 14, 2018

REV. # 5