


PLAN VIEW


BOLT CIRCLE DIAMETER AS REQUIRED

| PRODUCT CODE | POLE HEIGHT (ft.) | BASE BURIAL DEPTH "X" (ft.) | OVERALL LENGTH (ft.) | WEIGHT (kg/lbs.) |
|--------------|----------------------|--------------------------------|-------------------------|---------------------|
| E-50-24 (8) | 10-15 | 5 | 8 | 1,800kg / 4,000lbs |
| E-50-24 (9) | 16-25 | 6 | 9 | 2,000kg / 4,400lbs |
| E-50-24 (10) | 26-35 | 7 | 10 | 2,200kg / 4,850lbs |
| E-50-24 (11) | 36-45 | 8 | 11 | 2,400kg / 5,300lbs |
| E-50-24 (12) | 46-50 | 9 | 12 | 2,600kg / 5,750lbs |

* BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT

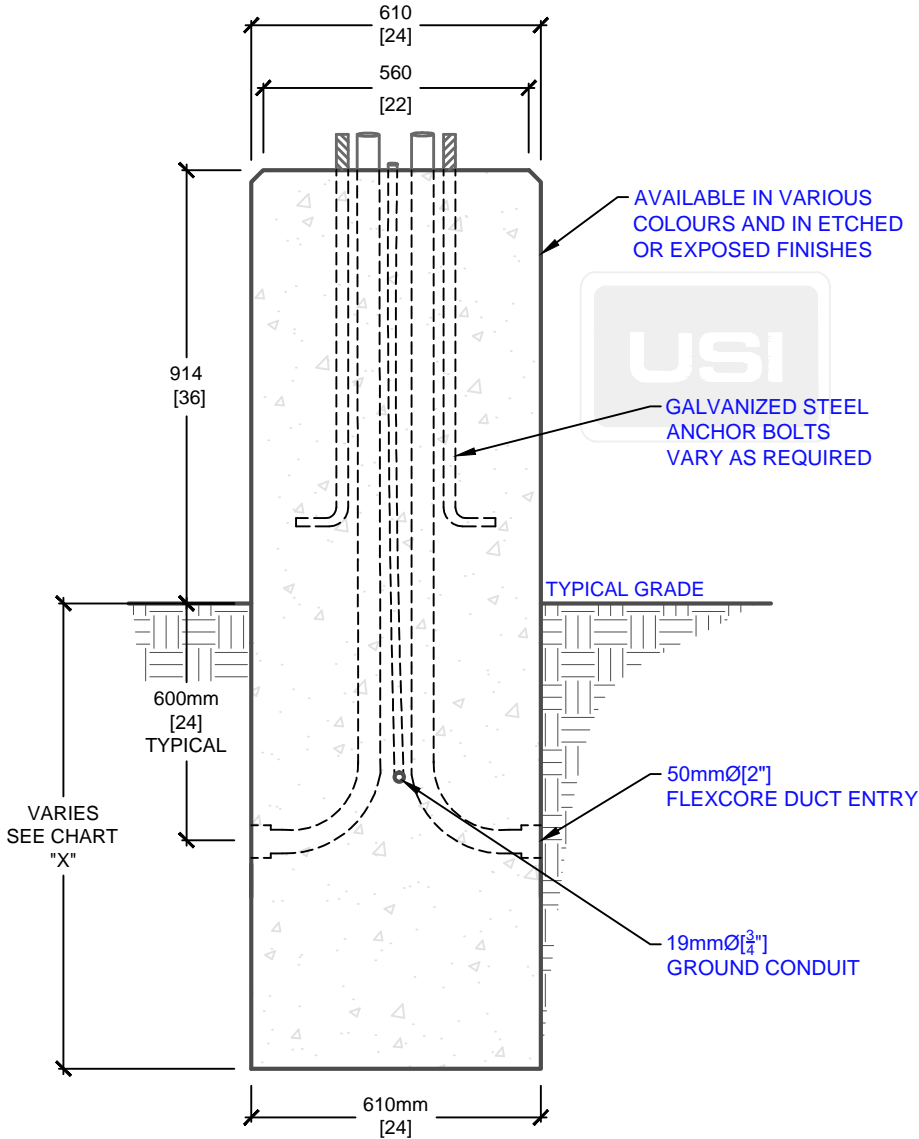

SIDE ELEVATION

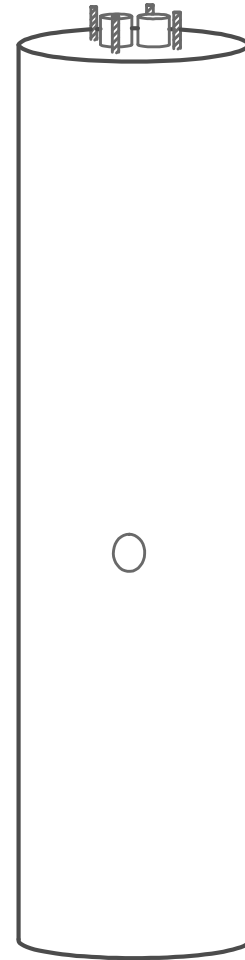

ISOMETRIC VIEW

mm [Inches]
ALL DIMENSIONS DEFAULT TO MILLIMETRES



UTILITY STRUCTURES INC.

61 BONGARD AVE | OTTAWA, ON | K2E 6V2
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

www.utilitystructures.com

CONSTRUCTION DETAILS:

- ACCOMMODATES VARIOUS POLE HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 150mm[6"] TO 380mm[15"]

- CSA 23.4-05
- 45 MPa (6525psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

PRODUCT CODE:

E-50-24(H)
24" DIA. PARKING LOT POLE BASE

DIMENSIONS:

VARIES(H) X 610mm dia.

TOTAL WEIGHT:

VARIES

REVISION DATE:

AUGUST 30, 2017

REV. # 1