



**PLAN VIEW**

PRODUCT CODE	POLE HEIGHT (ft.)	BASE BURIAL DEPTH (ft.)	OVERALL LENGTH "X" (ft.)	WEIGHT (kg/lbs.)
P-50-30 (8)	10-15	5'	8'	2,605kg / 5,730lbs
P-50-30 (9)	16-27	6'	9'	2,880kg / 6,336lbs
P-50-30 (10)	28-38	7'	10'	3,200kg / 7,040lbs
P-50-30 (11)	39-49	8'	11'	3,520kg / 7,744lbs
P-50-30 (12)	50-58	9'	12'	3,840kg / 8,448lbs

\* BASE BURIAL DEPTH SUBJECT TO SOIL CONDITIONS, REFER TO SOIL REPORT

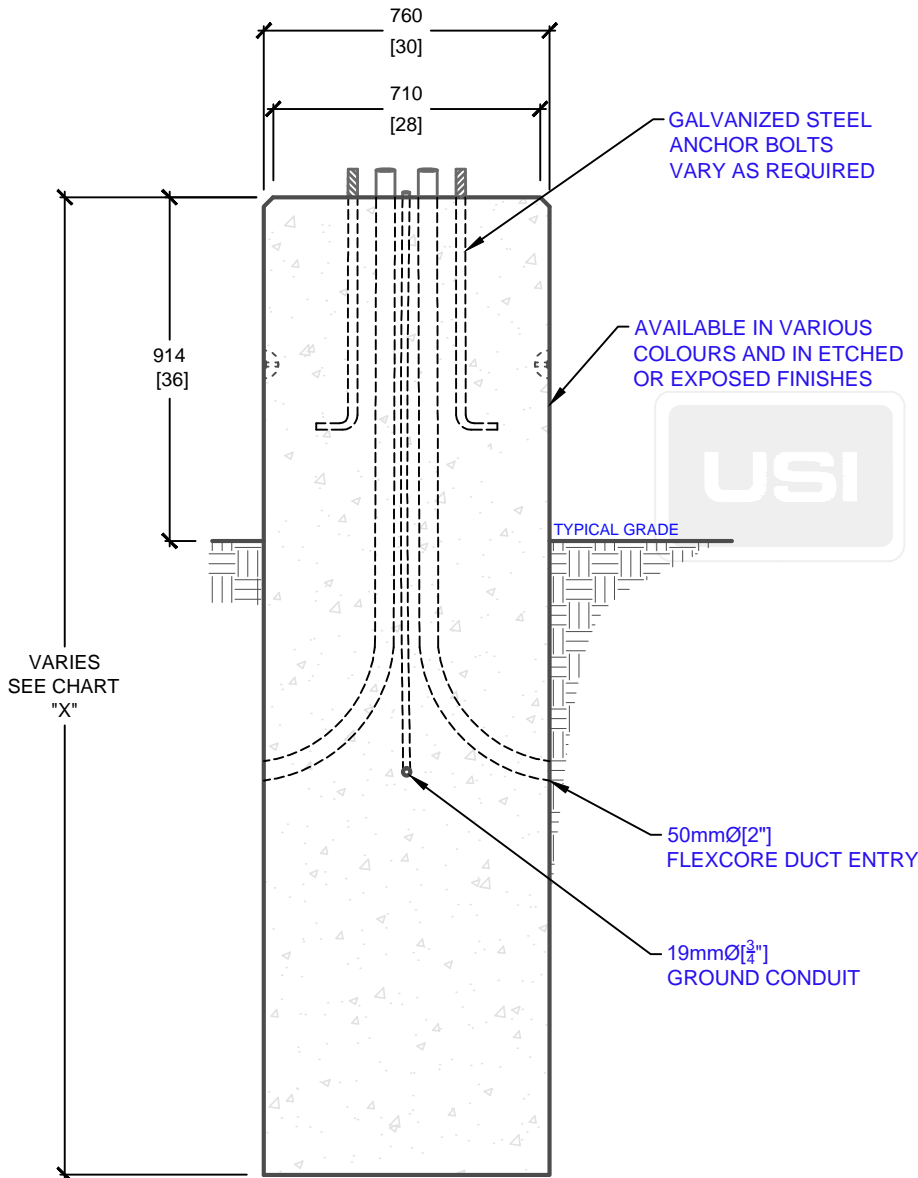

**SIDE ELEVATION**

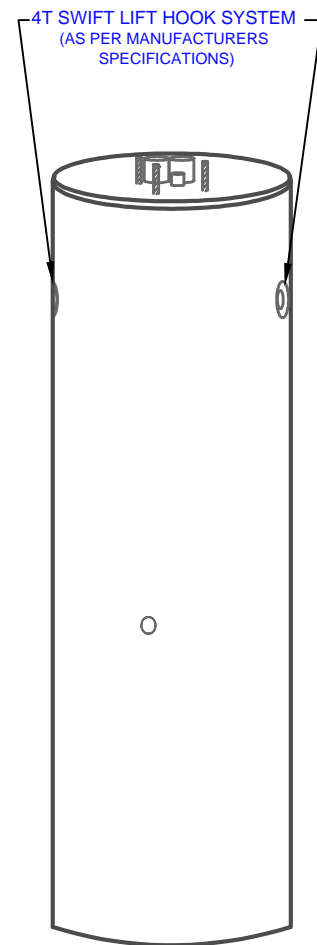

**ISOMETRIC VIEW**

mm  
[Inches]  
ALL DIMENSIONS DEFAULT TO MILLIMETRES



**UTILITY STRUCTURES INC.**

61 BONGARD AVE | OTTAWA, ON | K2E 6V2  
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

[www.utilitystructures.com](http://www.utilitystructures.com)

**CONSTRUCTION DETAILS:**

- ACCOMMODATES VARIOUS POLE HEIGHTS
- AVAILABLE IN VARIOUS COLOURS & FINISHES
- ADJUSTABLE BOLT CIRCLE DIAMETER
- BOLT CIRCLE DIAMETER: 150mm[6"] TO 460mm[18"]

- CSA 23.4-05
- 45 MPa (6525psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

**PRODUCT CODE:**

**P-50-30 (H)**

30" DIAMETER PARKING LOT POLE BASE

**DIMENSIONS:**

**VARIES(H) X 760mm dia.**

**TOTAL WEIGHT:**

**VARIES**

**REVISION DATE:**

**JULY 31, 2018**

**REV. # 2**